

# NFK AH type Hot Air Generator



## Key Features


1. Hot air temperature : 250 ~ 950 °C.  
Consider for out of range for the standard Temperature.
2. Double cylinder type for save energy.  
Chilled the outer wall by the dilution air for prevent heat dissipation,
3. The kind of fuel: Gas, Pulverized coal and Oil.
4. Integrated fitted with a valve unit and the control panel.
5. Used to heat the air also circulating gas other than air.

**NFK**® **NIPPON FURNACE CO.,LTD**

# Double cylinder type Hot Air Generator

at 400 deg C

Model No.	Capacity		Total length A mm	Diameter.		Weight kg
	kW	kcal/h		B mm		
AH0500 -4	5,814	5,000,000	3,000	1,920	7,800	
AH0600 -4	6,977	6,000,000	3,200	2,010	8,700	
AH0700 -4	8,140	7,000,000	3,400	2,100	9,500	
AH0800 -4	9,302	8,000,000	3,600	2,180	10,300	
AH1000 -4	11,628	10,000,000	3,900	2,310	11,800	
AH1200 -4	13,953	12,000,000	4,200	2,430	13,300	
AH1400 -4	16,279	14,000,000	4,400	2,540	16,500	
AH1600 -4	18,605	16,000,000	4,700	2,640	18,100	
AH1800 -4	20,930	18,000,000	4,900	2,730	19,400	
AH2000 -4	23,256	20,000,000	5,100	2,820	20,800	
AH2250 -4	26,163	22,500,000	5,400	2,920	22,600	
AH2500 -4	29,070	25,000,000	5,700	3,020	24,500	

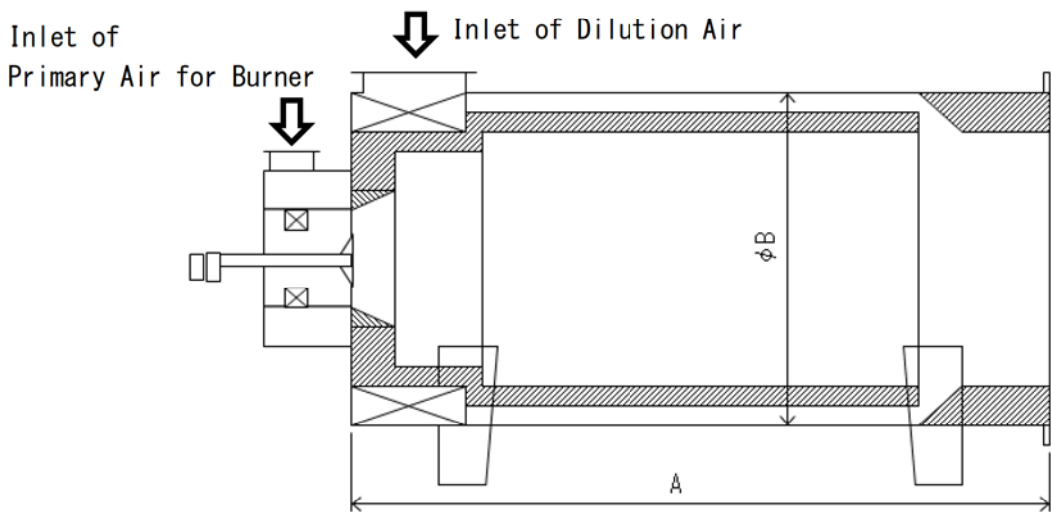

Copyright © 2015 NIPPON FURNACE CO., LTD. ALL RIGHTS RESERVED.

This brochure makes no offers, representations or warranties (express or implied), and information and data contained in this brochure are for general reference only and may change at any time.

● CONTACT

**NIPPON FURNACE CO., LTD.**

HEAD OFFICE

2-6, Futatsuya-cho, Kanagawa-ku, YOKOHAMA 221-0823 JAPAN  
TEL 045-872-8111 FAX 045-610-3940

OSAKA OFFICE

1-3-20, Miyahara, Yodogawa-ku, Osaka,  
532-0003

TEL 06-6395-2219 FAX 06-6394-5692

E-mail: sales@furnace.co.jp

URL: <http://www.furnace.co.jp/>